

P-Channel Enhancement Mode MOSFET



Features

- 30V/-3A,
 $R_{DS(ON)} = 46m\Omega$ (typ.) @ $V_{GS} = -10V$
 $R_{DS(ON)} = 55m\Omega$ (typ.) @ $V_{GS} = -4.5V$
 $R_{DS(ON)} = 79m\Omega$ (typ.) @ $V_{GS} = -2.5V$
- Super High Dense Cell Design
- Reliable and Rugged
- Enhance ESD Cell Protection
- Lead Free and Green Devices Available
(RoHS Compliant)

Applications

- Power Management in LCD TV, Monitor, Notebook Computer, Portable Equipment and Battery Powered Systems

Pin Description



P-Channel MOSFET

Ordering and Marking Information

MP3401 □□-□□ □ Assembly Material Handling Code Temperature Range Package Code	Package Code A : SOT-23-3 Operating Junction Temperature Range C : -55 to 150 °C Handling Code TR : Tape & Reel Assembly Material G: Halogen and Lead Free Device
MP3401A : A03X	X - Date Code

Note: Major Power lead-free products contain molding compounds/die attach materials and 100% matte tin plate termination finish; which are fully compliant with RoHS. Major Power lead-free products meet or exceed the lead-free requirements of IPC/JEDEC J-STD-020C for MSL classification at lead-free peak reflow temperature. Major Power defines "Green" to mean lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight).

Major Power reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

**Absolute Maximum Ratings** ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter		Rating	Unit
V _{DSS}	Drain-Source Voltage		-30	V
V _{GSS}	Gate-Source Voltage		±10	
I _D *	Continuous Drain Current	V _{GS} =-10V	-3	A
I _{DM} *	300μs Pulsed Drain Current		-12	
I _S *	Diode Continuous Forward Current		-1	A
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	
P _D *	Maximum Power Dissipation	T _A =25°C	0.83	W
		T _A =100°C	0.3	
R _{θJA} *	Thermal Resistance-Junction to Ambient		150	°C/W

Note : *Surface Mounted on 1in² pad area, $t \leq 10$ sec.**Electrical Characteristics** ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	MP3401A			Unit
			Min.	Typ.	Max.	
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =-250μA	-30	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-24V, V _{GS} =0V	-	-	-1	μA
		T _J =85°C	-	-	-30	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =-250μA	-0.6	-1	-1.5	V
I _{GSS}	Gate Leakage Current	V _{GS} =±10V, V _{DS} =0V	-	-	±10	μA
R _{DS(ON)} ^a	Drain-Source On-state Resistance	V _{GS} =-10V, I _{DS} =-3A	-	46	55	mΩ
		V _{GS} =-4.5V, I _{DS} =-2A	-	55	70	
		V _{GS} =-2.5V, I _{DS} =-1A	-	79	115	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} =-1A, V _{GS} =0V	-	-0.75	-1.3	V
t _{rr}	Reverse Recovery Time	I _{SD} =-3A, I _{SD} /dt=100A/μs	-	15	-	ns
Q _{rr}	Reverse Recovery Charge		-	7	-	nC



Electrical Characteristics (Cont.) ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Test Conditions	MP3401A			Unit
			Min.	Typ.	Max.	
Dynamic Characteristics ^b						
R _G	Gate Resistance	V _{GS} =0V,V _{DS} =0V,F=1MHz	-	8	-	Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =-15V, Frequency=1.0MHz	-	780	-	pF
C _{oss}	Output Capacitance		-	100	-	
C _{rss}	Reverse Transfer Capacitance		-	60	-	
t _{d(ON)}	Turn-on Delay Time	V _{DD} =-15V, R _L =15Ω, I _{DS} =-1A, V _{GEN} =-10V, R _G =6Ω	-	8	15	ns
t _r	Turn-on Rise Time		-	12	23	
t _{d(OFF)}	Turn-off Delay Time		-	40	73	
t _f	Turn-off Fall Time		-	16	30	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} =-15V, V _{GS} =-10V, I _{DS} =-3A	-	15.5	22	nC
Q _{gs}	Gate-Source Charge		-	1.5	-	
Q _{gd}	Gate-Drain Charge		-	2.6	-	

Note a : Pulse test ; pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.


Note b : Guaranteed by design, not subject to production testing.

Typical Operating Characteristics


Power Dissipation

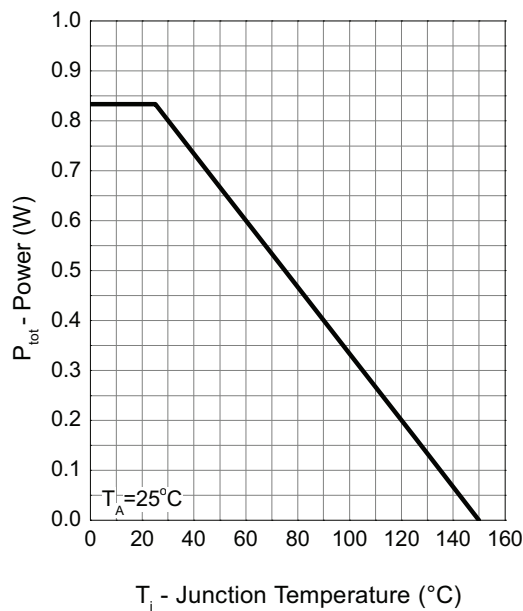


Drain Current

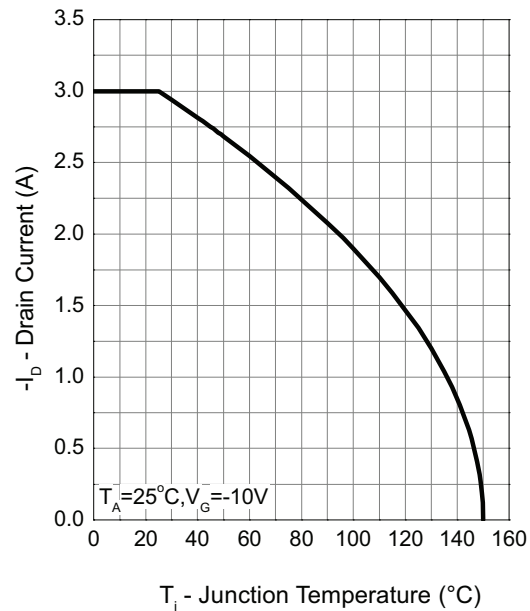

Safe Operation Area

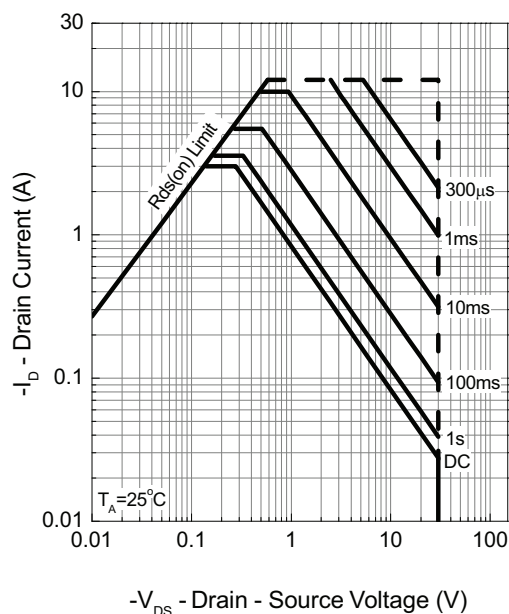


Thermal Transient Impedance

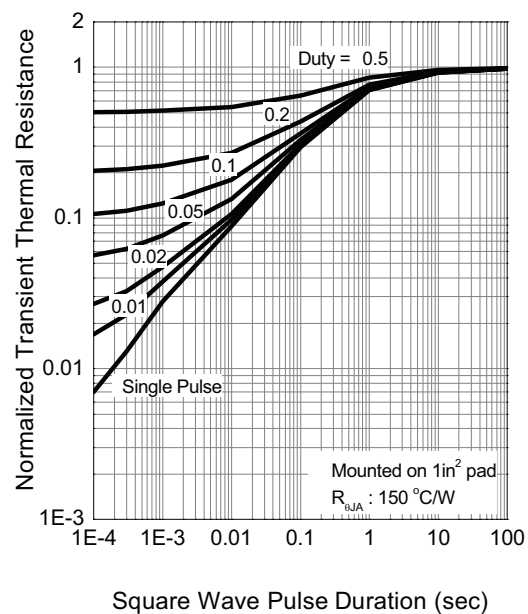


Typical Operating Characteristics (Cont.)


Output Characteristics

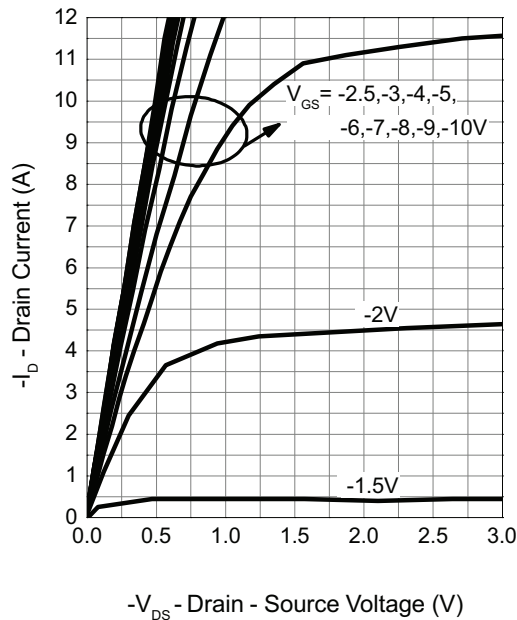


Drain-Source On Resistance

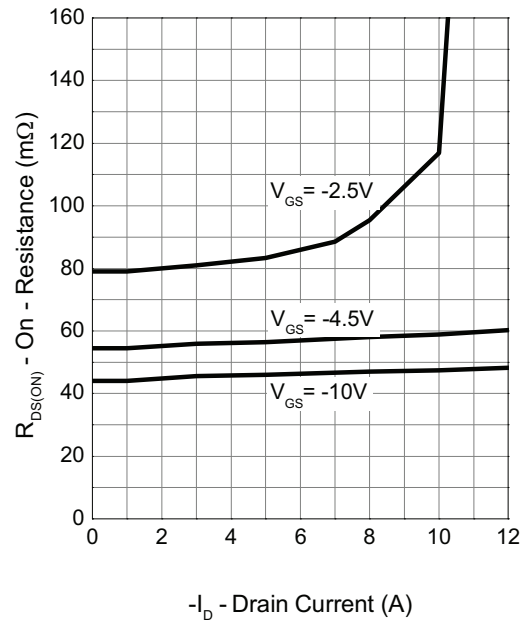

Gate-Source On Resistance

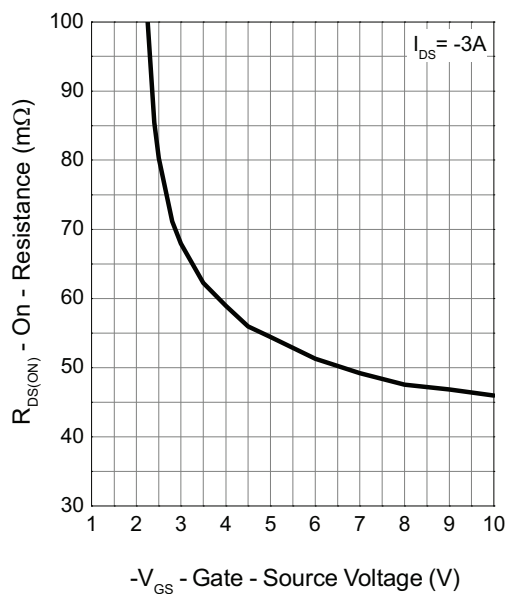


Gate Threshold Voltage

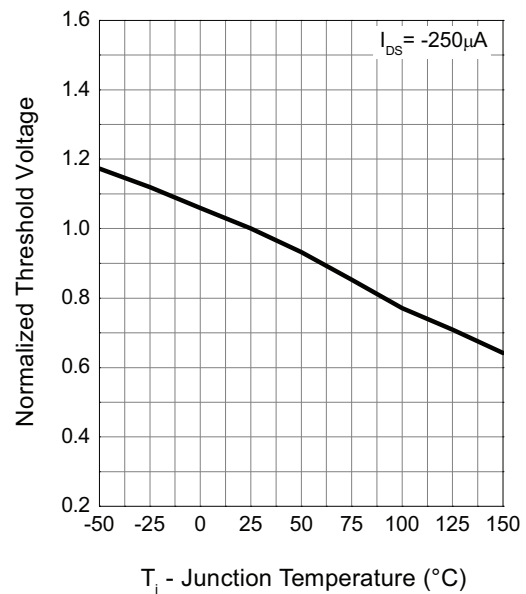


Typical Operating Characteristics (Cont.)


Drain-Source On Resistance

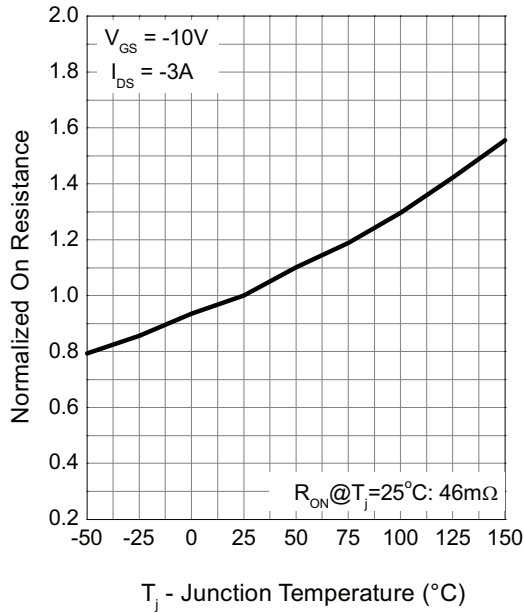


Source-Drain Diode Forward

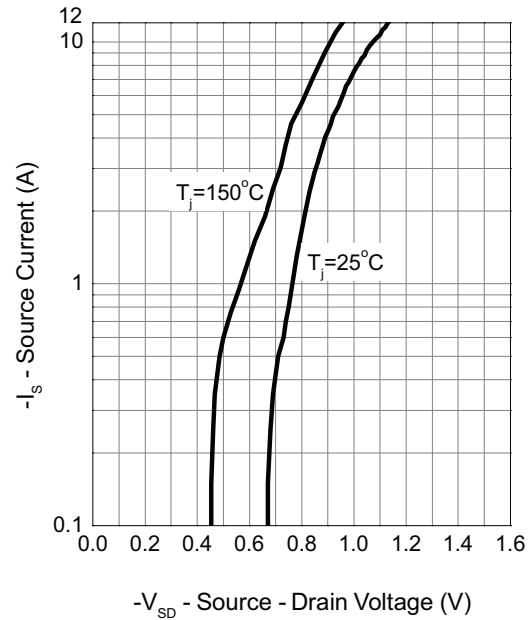

Capacitance

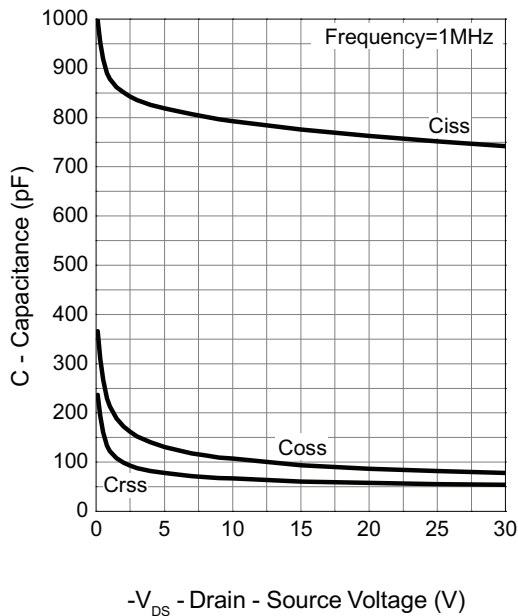


Gate Charge

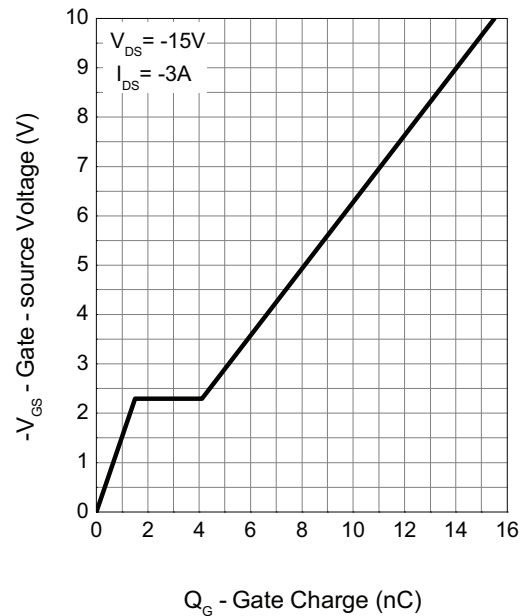

Package Information


SOT-23-3

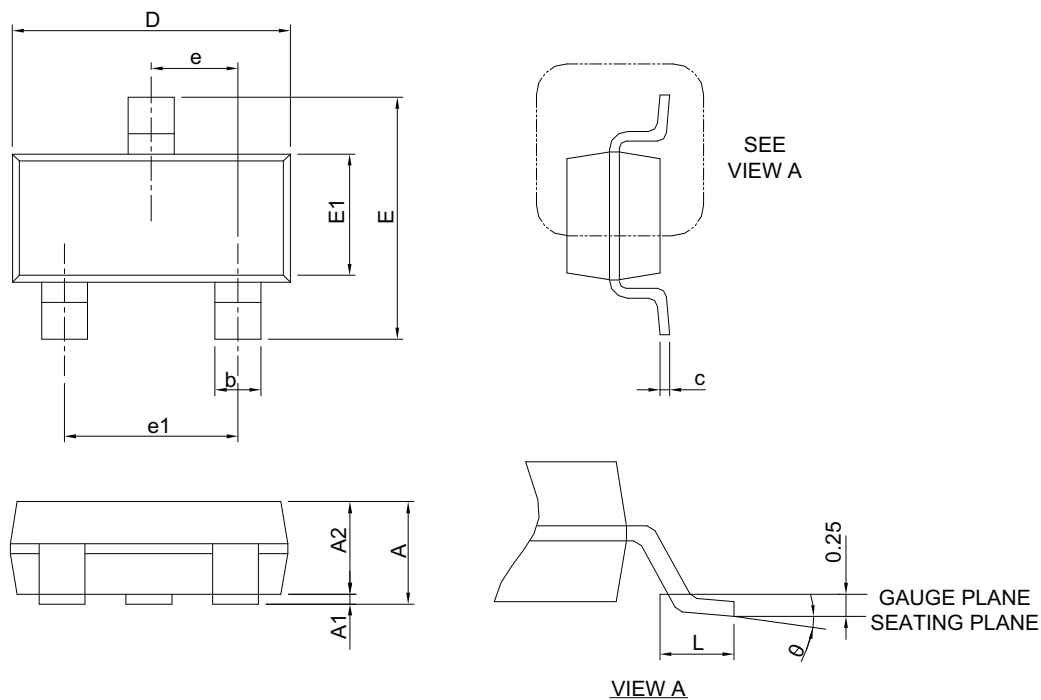

SOT-23-3	SOT-23-3			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A		1.45		0.057
A1	0.00	0.15	0.000	0.006
A2	0.90	1.30	0.035	0.051
b	0.30	0.50	0.012	0.020
c	0.08	0.22	0.003	0.009
D	2.70	3.10	0.106	0.122
E	2.60	3.00	0.102	0.118
E1	1.40	1.80	0.055	0.071
e	0.95 BSC		0.037 BSC	
e1	1.90 BSC		0.075 BSC	
L	0.30	0.60	0.012	0.024
θ	0°	8°	0°	8°

Note : Dimension D and E1 do not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 10 mil per side.

Carrier Tape & Reel Dimensions

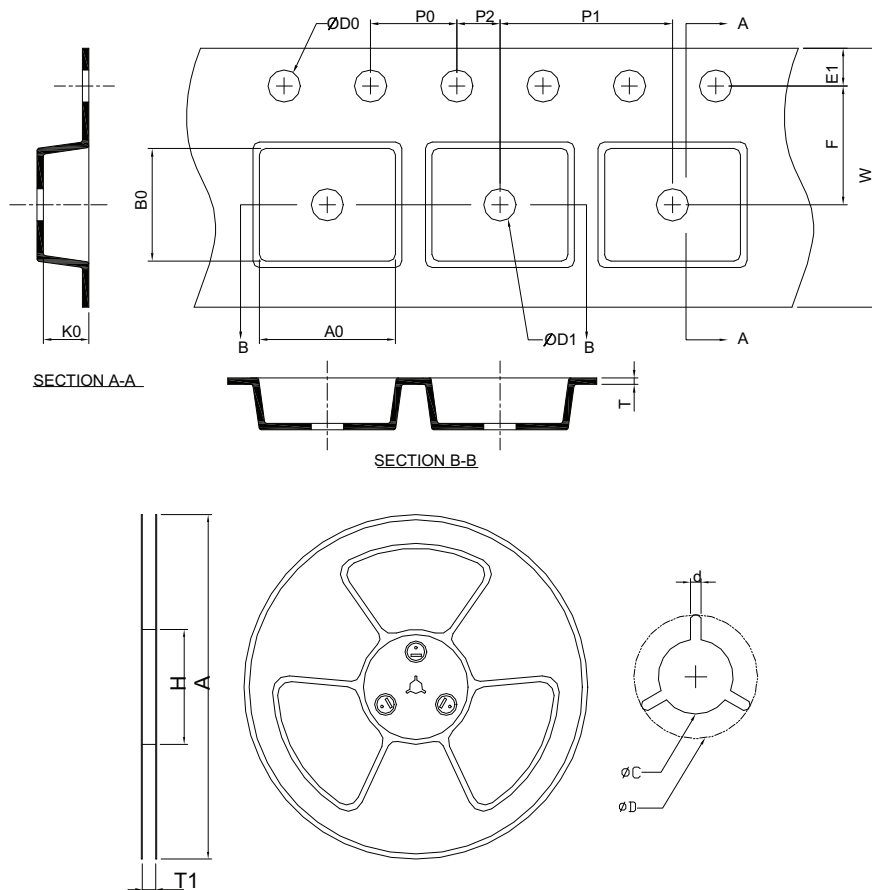

Application	A	H	T1	C	d	D	W	E1	F
SOT-23-3	178.0±2.00	50 MIN.	8.4+2.00 -0.00	13.0+0.50 -0.20	1.5 MIN.	20.2 MIN.	8.0±0.30	1.75±0.10	3.5±0.05
	P0	P1	P2	D0	D1	T	A0	B0	K0
	4.0±0.10	4.0±0.10	2.0±0.05	1.5+0.10 -0.00	1.0 MIN.	0.6+0.00 -0.40	3.20±0.20	3.10±0.20	1.50±0.20


(mm)

Devices Per Unit


Package Type	Unit	Quantity
SOT-23-3	Tape & Reel	3000

Taping Direction Information

SOT-23-3

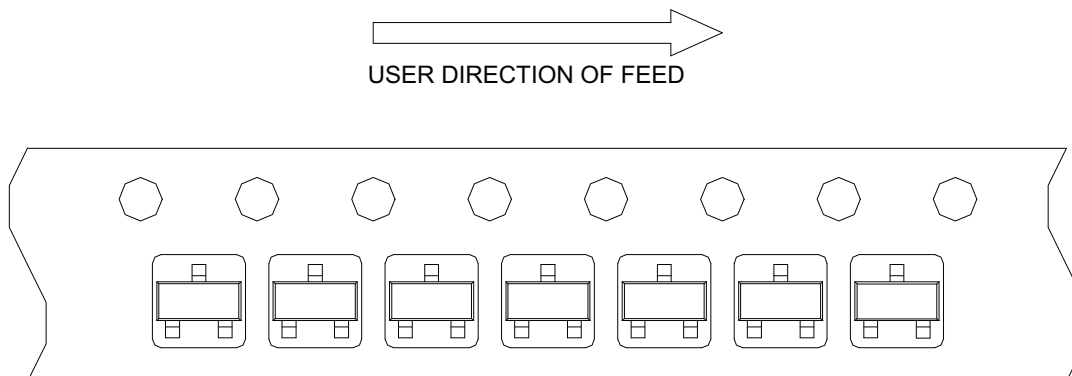

Classification Profile

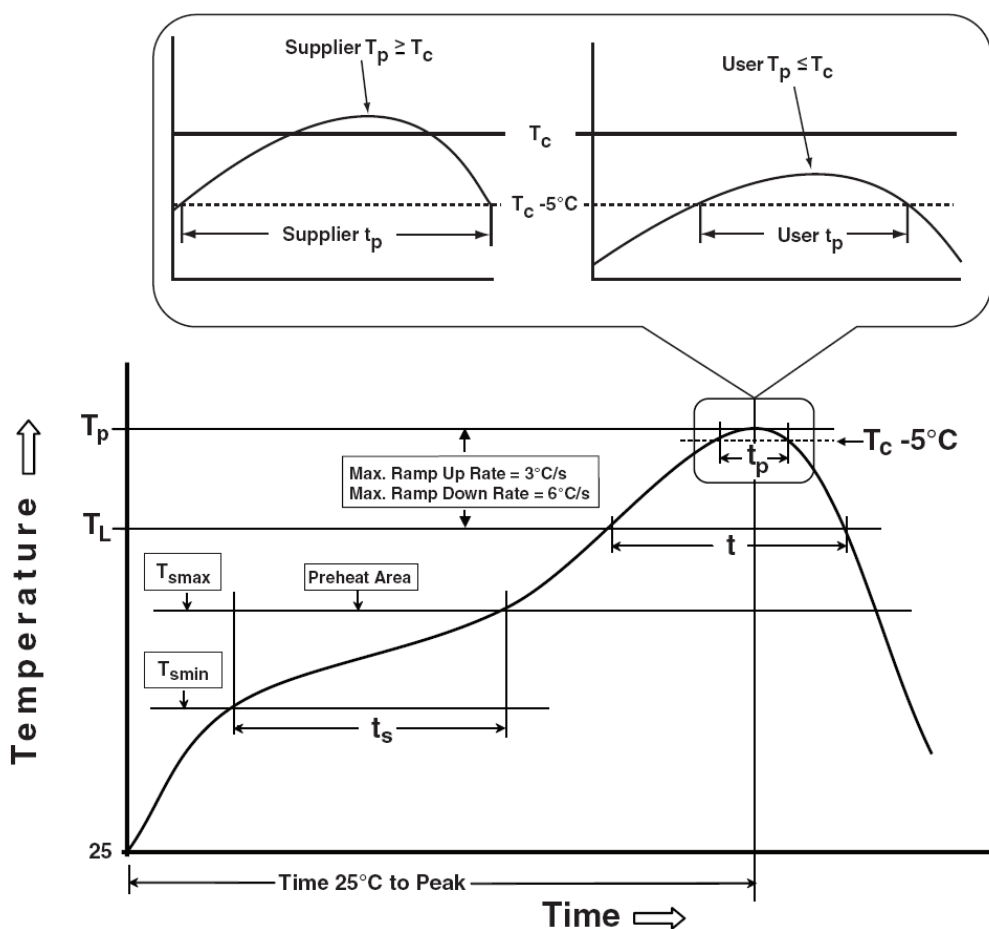

Classification Reflow Profiles

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat & Soak Temperature min (T_{smin}) Temperature max (T_{smax}) Time (T_{smin} to T_{smax}) (t_s)	100 °C 150 °C 60-120 seconds	150 °C 200 °C 60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max.	3°C/second max.
Liquidous temperature (T_L) Time at liquidous (t_L)	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak package body Temperature (T_p)*	See Classification Temp in table 1	See Classification Temp in table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20** seconds	30** seconds
Average ramp-down rate (T_p to T_{smax})	6 °C/second max.	6 °C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.
* Tolerance for peak profile Temperature (T_p) is defined as a supplier minimum and a user maximum. ** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.		

Table 1. SnPb Eutectic Process – Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2. Pb-free Process – Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm – 2.5 mm	260 °C	250 °C	245 °C
≥2.5 mm	250 °C	245 °C	245 °C

Reliability Test Program

Test item	Method	Description
SOLDERABILITY	JESD-22, B102	5 Sec, 245°C
HOLT	JESD-22, A108	1000 Hrs, Bias @ 125°C
PCT	JESD-22, A102	168 Hrs, 100%RH, 2atm, 121°C
TCT	JESD-22, A104	500 Cycles, -65°C~150°C